volvac

PACKAGING SOLUTIONS



VACUUM & TRAY SEALER MACHINES

VOLVAC

About Us



VOLVAC: A Global Leader in Vacuum Packaging & Tray Sealing Solutions
As a proud representative of Turkey, VOLVAC has successfully combined advanced technology with the strength of domestic production to emerge as a globally recognized brand in vacuum packaging and tray sealing machine manufacturing. With 18 years of expertise in the packaging and food machinery sector, VOLVAC has established a strong presence in strategic markets, including the USA, Russia, China, Germany, France, Israel, Pakistan, Ukraine, and Egypt, effectively positioning Turkey on the global stage.

Industry Leadership & Diverse Product Portfolio

VOLVAC sets itself apart in the industry with a comprehensive product portfolio, featuring vacuum packaging machines, tray sealing machines, dip tank machines, shrink & drying tunnels, and slicing machines. These machines, continuously enhanced through cutting-edge R&D efforts, are designed and manufactured to meet global standards. Produced at VOLVAC's state-of-the-art facility in Istanbul, each machine undergoes ISO-certified manufacturing and holds CE and other international quality certifications, ensuring top-tier reliability and performance.

Strategically located near Sabiha Gökçen Airport, VOLVAC operates with a focus on speed, efficiency, and precision, ensuring prompt and accurate responses to customer demands.

Commitment to Quality & International Standards

VOLVAC maintains an unwavering commitment to quality and competitive pricing, ensuring the highest levels of customer satisfaction. Whether manufacturing its own equipment or importing specialized food processing machinery, the company leads the sector by utilizing local resources and suppliers to produce machines that adhere to international standards. Every machine undergoes rigorous CE and ISO-compliant quality assurance testing before being released to the market.

Situated in Pendik/Kurtköy, just five minutes from the Istanbul Ring Road (O6) and Sabiha Gökçen Airport, VOLVAC's modern manufacturing facility is a testament to its competitive strength in the global marketplace.

Global Reach & Customer-Centric Approach

With exports to over 42 countries, VOLVAC is dedicated to excellence in both product quality and after-sales support. Its extensive product range, including vacuum packaging machines, plate and bowl sealing machines, dip tank machines, and slicing machines, is readily available from stock to ensure timely delivery. Supported by continuous R&D investments, VOLVAC's machines are manufactured with precision CNC technology, offering exceptional performance and easy maintenance.

Operating with a zero-error approach in machine quality and backed by a customer-first philosophy, VOLVAC remains at the forefront of the packaging industry, driving innovation and setting new standards for reliability and efficiency worldwide.



VOLVAC

Certificates

















VOLVAC

Packaging Solutions



















Index

- Tray Sealing Machines
- Skinpack Machines
- Termoform Machines
- Vacuum Packaging Machines
- Dip Tank Machines
- Automatic Slicer Machine






TRAY SEALING MACHINES




- Full Automatic Models
  (PTS83, E42 PRO, E35 PRO, E30 PRO, E42, E35, E30)
- Rotary Models
  (AXIS)
- Drawers Models
  (E52 , E26, TS40, TS52)
- Semi Automatic Models
  (W850VG, W650VG, W450VG)
- Manual Models
  (TS350, TS450)




Full Automatic Models PTS83

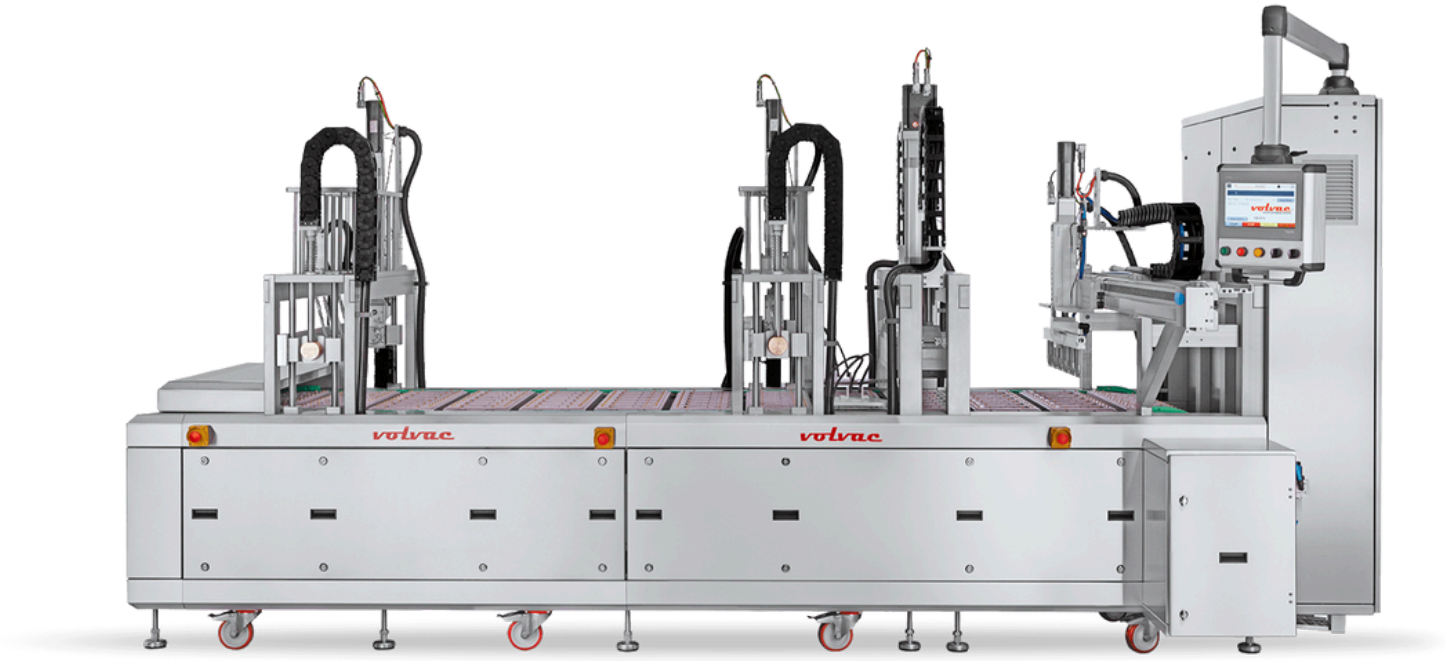

- **Machine Dimensions :** 2809x4496xh2254 mm
- **Pump Capacity :** 150 m³ (Option 200 m³, 300 m³/h)
- **Cycle:** 15-20 Cycles Per Minute
- **Electric & PLC System:** SCHINEIDER / OMRON
- **Maximum Tray Height:** 110 mm
- **Safety Sensors:** Leuze Sick and Carlo Gavazzi Sensor
- **Motor & Encoder System:** Schneider Servo Motor
- **Operating Time:** 24 Hour Continuous Operation
- **Outer Body :** Stainless Steel AISI304 and Aluminum
- **Warranty :** 2 Years
- **Certificate:** CE

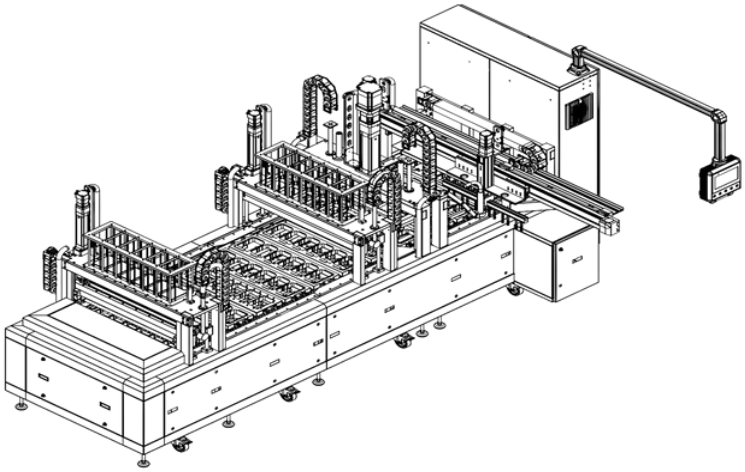


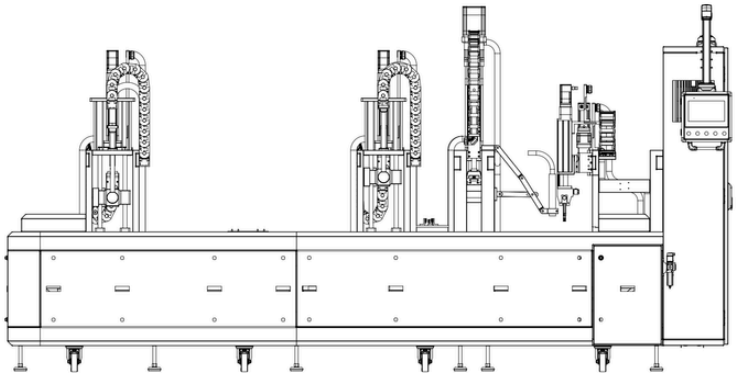


Full Automatic Models E42 PRO



- **Machine Dimensions :** 1653 x 4438 x 1837 h mm
- **Pump Capacity :** 300 m³ / h (100 m³ - 150 m³ - 200 m³)
- **Cycle:** 3-10 cycles/minute
- **Pneumatic System::** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **KW :** 5.5kW - 7kW - 9kW - 12kW
- **PLC System: SCHINEIDER / OMRON**
- **Max Roll Width :** 710mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

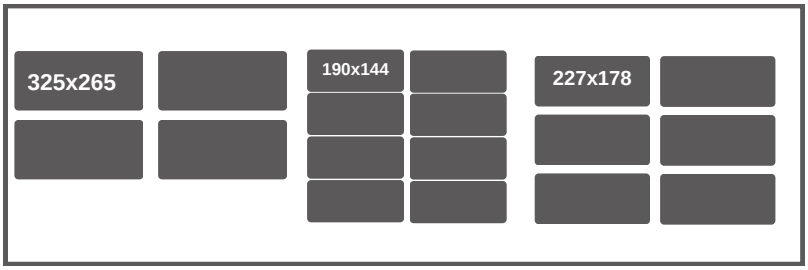


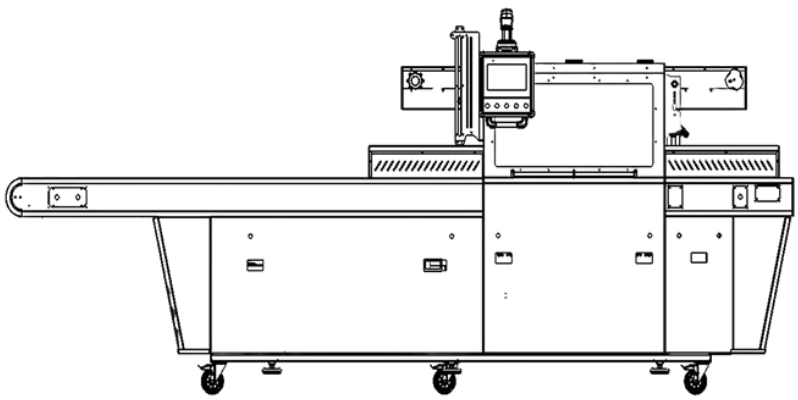


Full Automatic Models E35 PRO



- **Machine Dimensions :** 1710 x 3680 x 1850 h mm
- **Pump Capacity :** 100 m³ / h (150 m³ - 200 m³ - 300 m³)
- **Cycle:** 3-10 cycles/minute
- **Pneumatic System:** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 5.5 kW - 7kW - 9kW - 12kW
- **PLC System: SCHINEIDER / OMRON**
- **Max Roll Width :** 710mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 years
- **Certificate:** CE

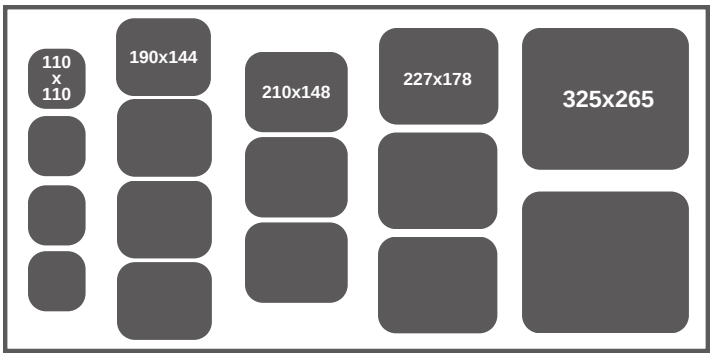

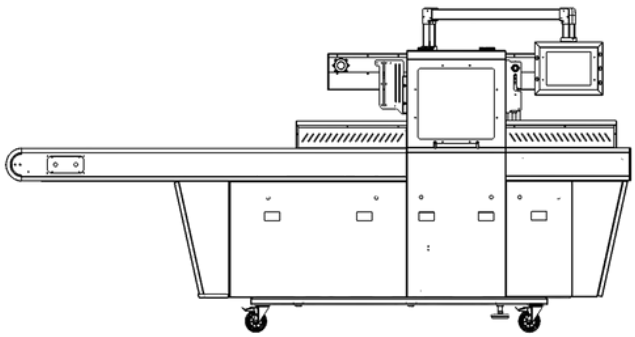


Full Automatic Models E30 PRO



- **Machine Dimensions :** 1413x3169x1837mm
- **Pump Capacity :** 100 m³/h (150 m³ - 200 m³ - 300 m³)
- **Cycle:** 3-10 cycles / minute
- **Pneumatic System:** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 5.5 kW - 7kW - 9kW - 12kW
- **PLC System:** SCHINEIDER / OMRON
- **Max Roll Width :** 450mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 3 Years
- **Certificate:** CE




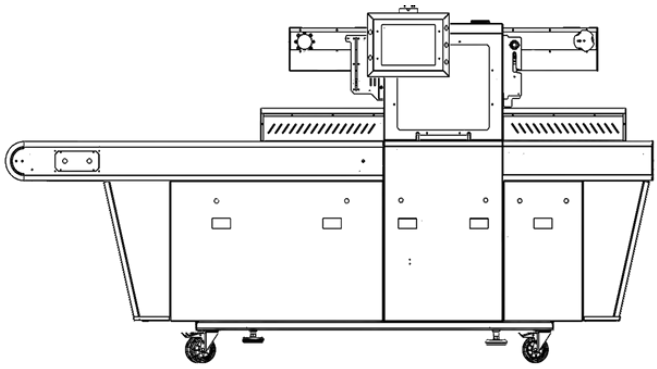


Full Automatic Models E42



- **Machine Dimensions :** 1245 x 4255 x 1780 h mm
- **Pump Capacity :** 300 m³ / h (100 m³ - 150 m³ - 200 m³)
- **Cycle:** 3 - 10 cycles/minute
- **Pneumatic System:** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 5.5kW - 7kW - 9kW - 12kW
- **PLC System: SCHINEIDER / OMRON**
- **Max Roll Width :** 720 mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

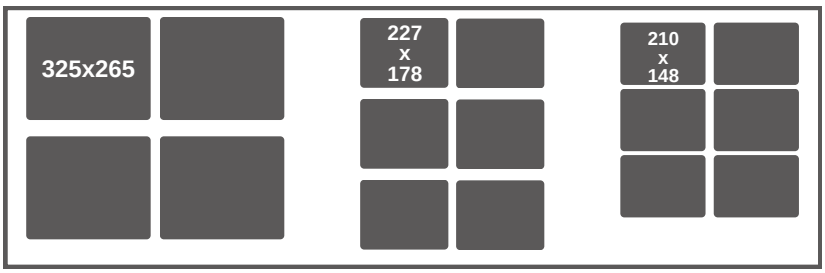


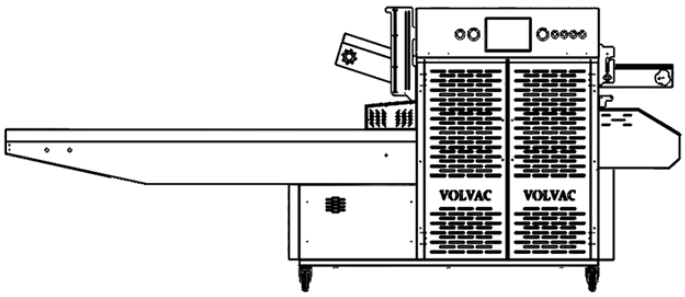


Full Automatic Models E35



- **Machine Dimensions :** 1170 x 3600 x 1780 h mm
- **Pump Capacity :** 100 m³ / h (150 m³ - 200 m³ - 300 m³)
- **Cycle:** 3 - 10 cycles/minute
- **Pneumatic System:** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 5.5 kW - 7kW - 9kW - 12kW
- **PLC System: SCHINEIDER / OMRON**
- **Max Roll Width :** 720 mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

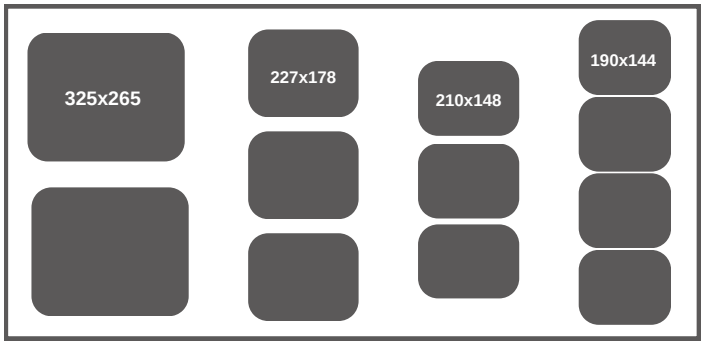


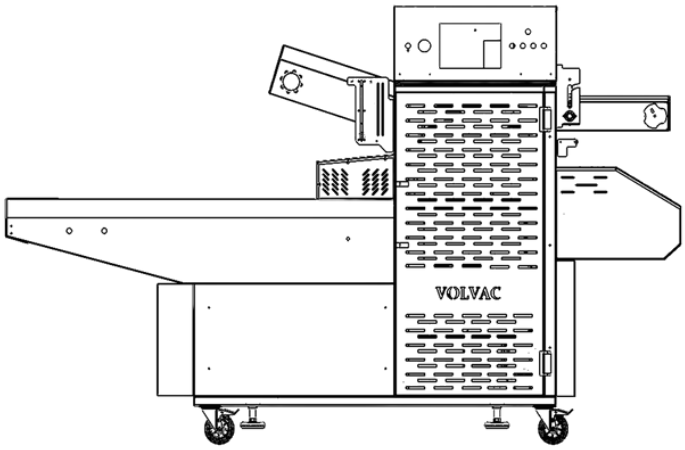


Full Automatic Models E30




- **Machine Dimensions :** 900 x 2890 x 1830 h mm
- **Pump Capacity:** 100 m³ / h (150 m³ - 200 m³ - 300 m³)
- **Cycle:** 3 - 10 cycles/minute
- **Pneumatic System:** SMC/FESTO
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 5.5 - 7 kW - 9kW - 12kW
- **PLC System: SCHINEIDER / OMRON**
- **Max Roll Width :** 460 mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

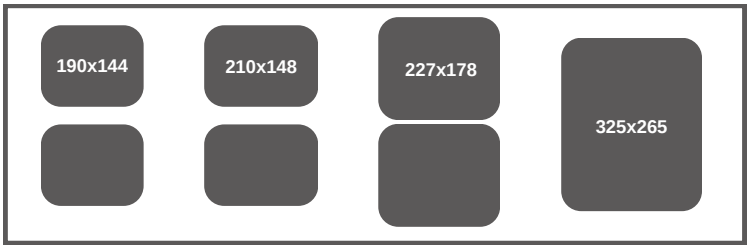


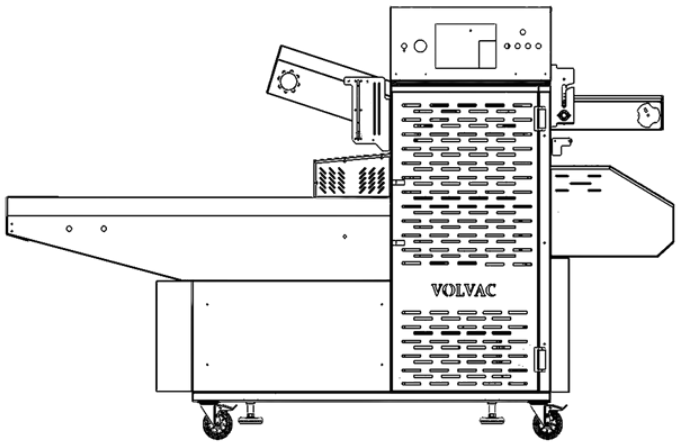

Rotary Models AXIS

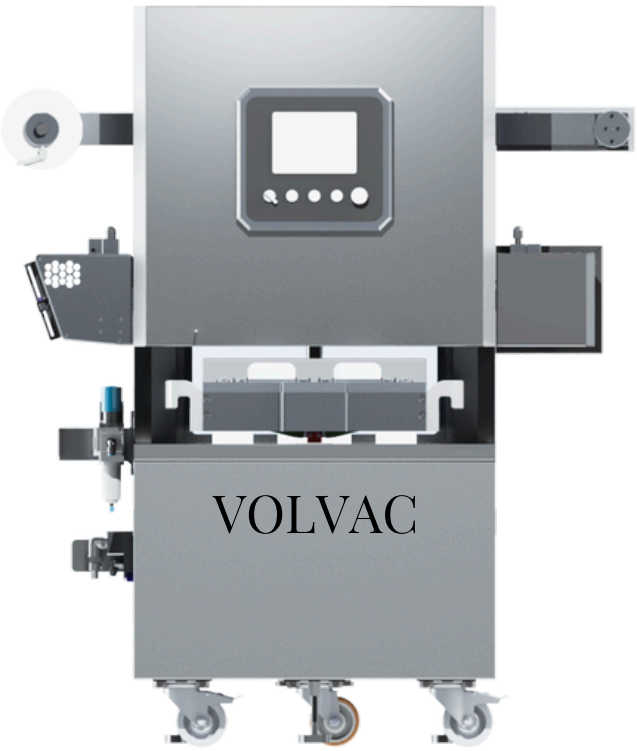


- **Machine Dimensions :** 1555 x 1445 x 1810 h mm
- **Pump Capacity :** 105 m³/h
- **Cycle:** 3-7 cycle/minutes (Vacuum+Gas)
- **PLC System: SCHINEIDER / OMRON**
- **Voltage :** 380V- 45A- 50 Hz, 3P+N+PE
- **kW:** 5 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Upper Film Width:** 450 mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

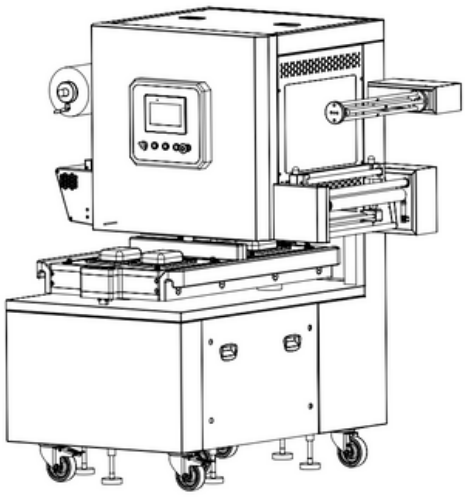


Drawers Models E52



- **Machine Dimensions :** 1500 x 950 x 1450 h mm
- **Pump Capacity :** 100 m³ / h (150 m³ Opt.)
- **Cycle:** 4– 5 cycle/minute
- **PLC System: SCHINEIDER / OMRON**
- **Voltage :** 240 V 50Hz
- **kW:** 5 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 470mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

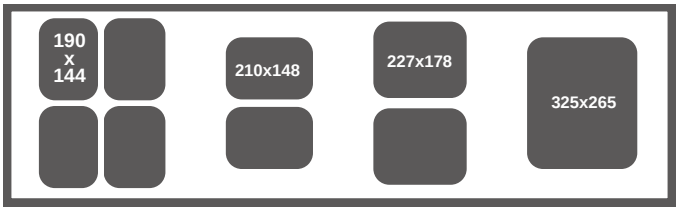


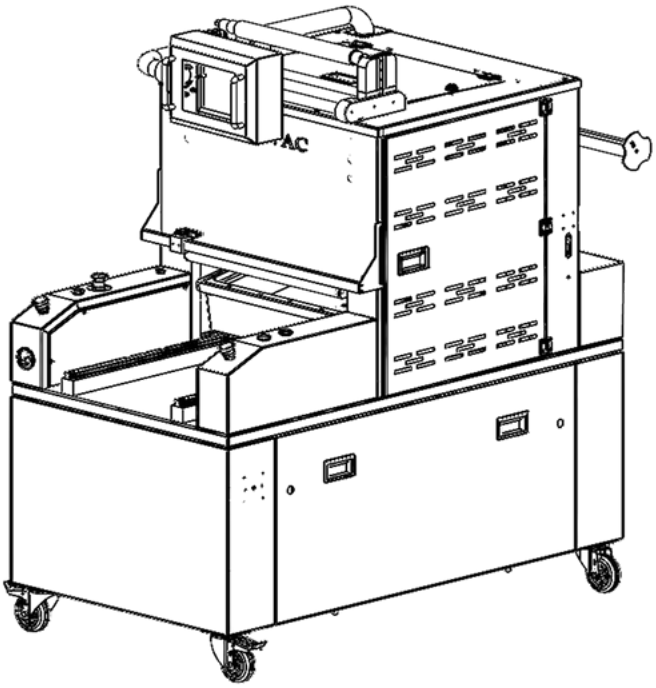


Drawers Models E26



- **Machine Dimensions :** 732 x 1060 x 752 h mm
- **Pump Capacity :** 21 m³ / h (45 m³ Opt.)
- **Cycle:** 4-5 cycle/minute
- **Weight:** 180 kg
- **Voltage :** 230/380V
- **kW:** 2kW / 4kW
- **Pneumatic Feeding :** 16 NI/6-8 bar
- **Max Roll Width :** 450mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

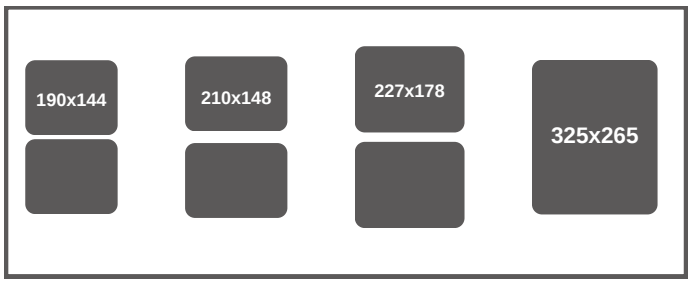


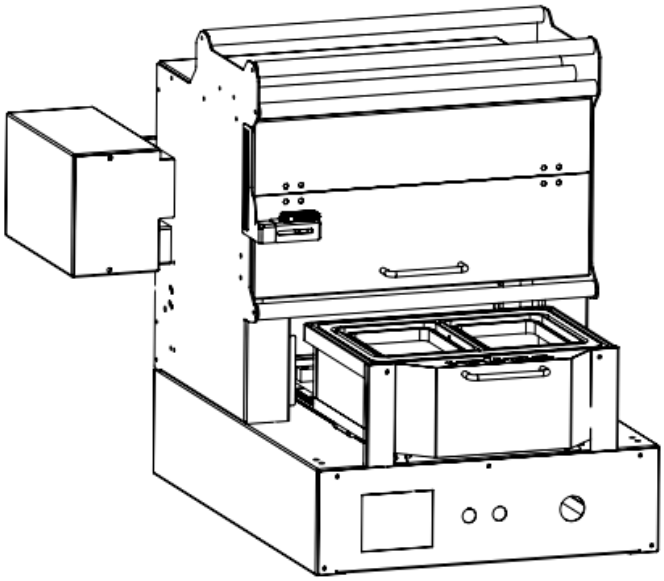


Semi Automatic Models W850VG



- **Machine Dimensions :** 740 x 767 x 1482 h mm
- **Pump Capacity :** 45 m³ / h (65 m³ Opt.)
- **Cycle:** 2 cycle/minute
- **Mold System:** Changeable Mold System
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 3 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 560 mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate :** CE

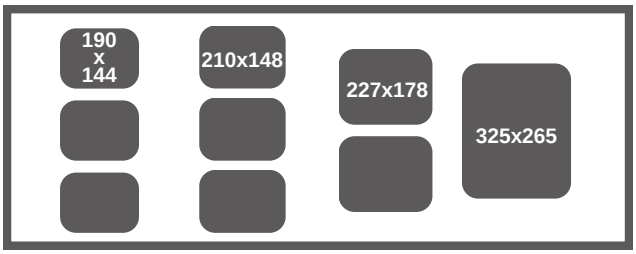


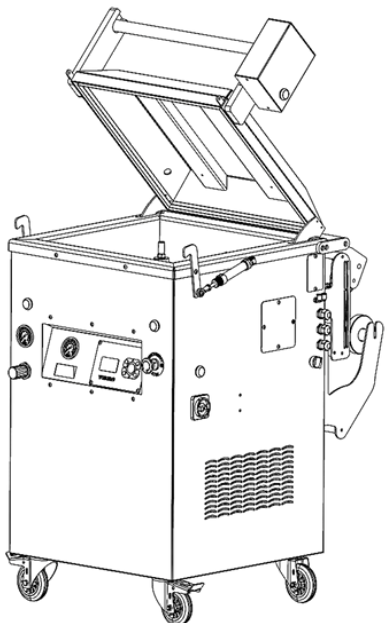


Semi Automatic Models W650VG



- **Machine Dimensions :** 840 x 667 x 1482 h mm
- **Pump Capacity :** 45 m³ / h (65 m³ Opt.)
- **Cycle:** 2 cycle/minute
- **Mold System:** Changeable Mold System
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 3 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 560mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

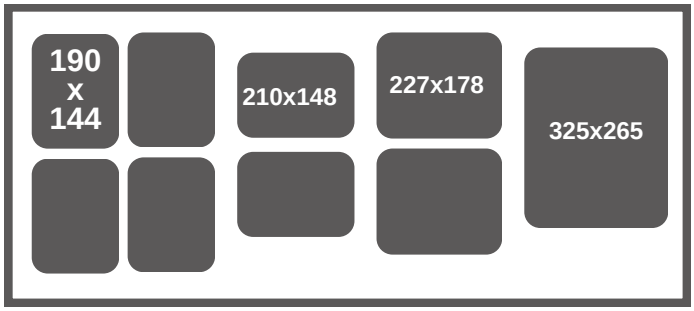


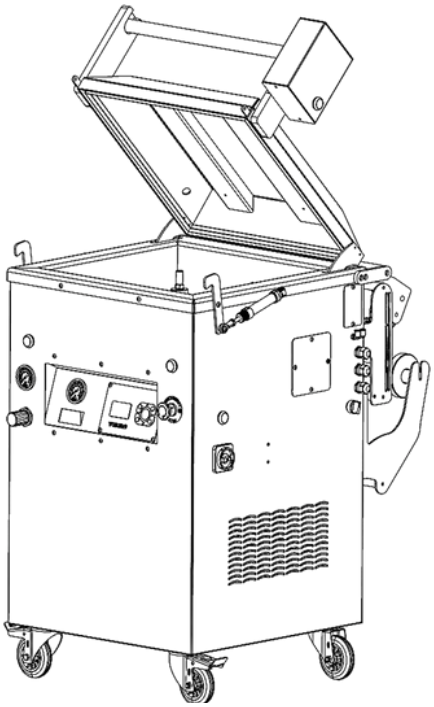


Semi Automatic Models W450VG



- **Machine Dimensions :** 740 x 667 x 1482 h mm
- **Pump Capacity :** 21 m³ / h
- **Cycle:** 2 cycle/minute
- **Mold System:** Changeable Mold System
- **Voltage :** 230v
- **kW:** 2.2 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 470mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

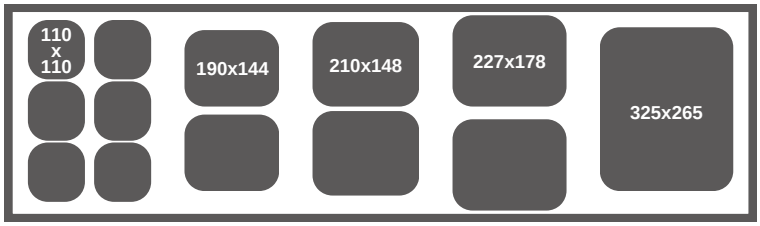


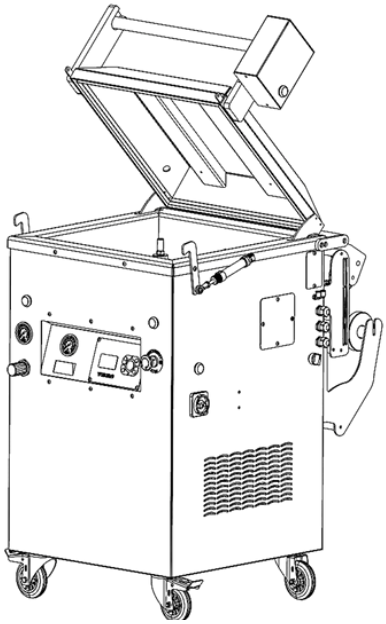



- **Machine Dimensions :** 1050 x 800 x 600 h mm
- **Pump Capacity :** 440 x 280 mm
- **Cycle:** 10 -12 cycle/minute
- **Mold System:** Changeable Mold System
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW:** 1.5 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 430mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE




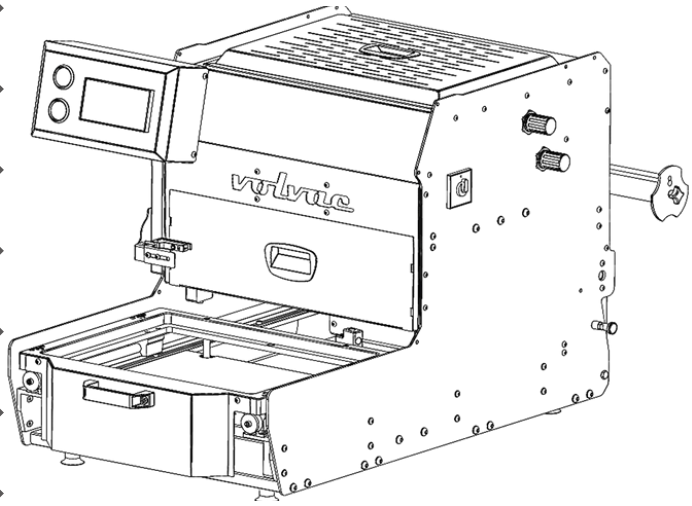


Drawers Models TS52




- **Machine Dimensions :** 1250 x 900 x 750 h mm
- **Pump Capacity :** 100m³ / 150m³
- **Cycle:** 10 – 12 cycle/minute
- **Mold System:** Changeable Mold System
- **Voltage :** 3P+N+PE 380V 50Hz
- **kW :** 1.5 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 450mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

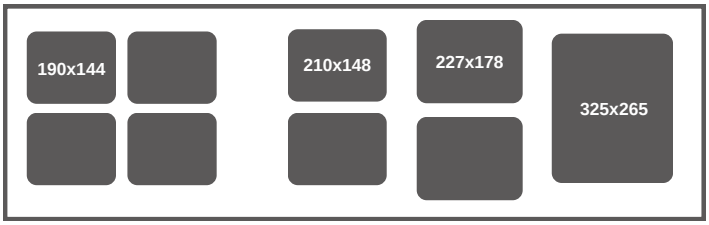

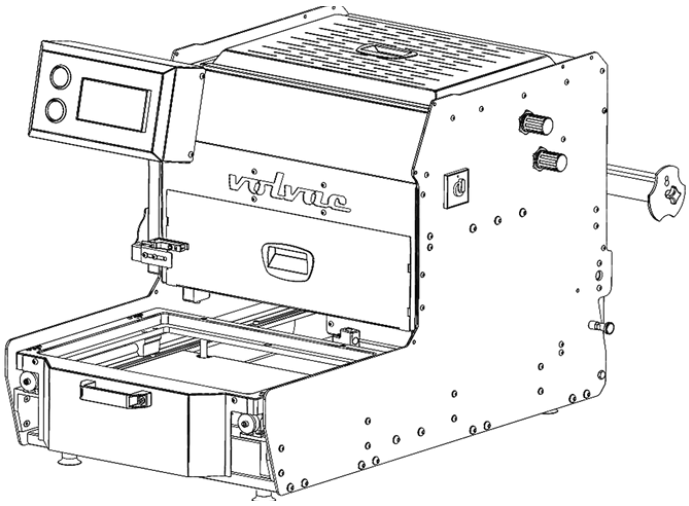




- **Machine Dimensions :** 465 x 352 x 320 h mm
- **Capacity :** 3 seconds average
- **Voltage :** 230 V
- **kW :** 1 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 270mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

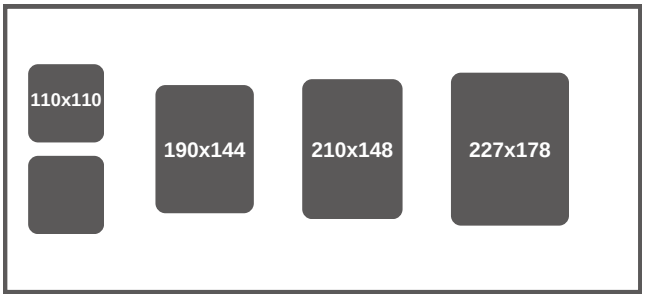


Manual Models TS450



- **Machine Dimensions :** 465 x 465 x 320 h mm
- **Capacity :** 900 plate per a hour
- **Voltage :** 230 V
- **kW :** 1kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Max Roll Width :** 270mm
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

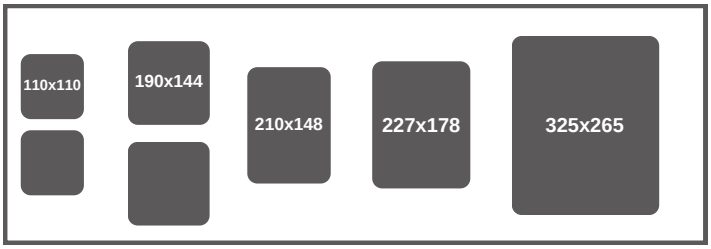


Type Of
Packaging Solutions



Cardboard Skinpack



Deep Skinpack



Skinpack











Vacuum MAP



Sealing



MAP









VOLVAC

Skinpack Machines

Skinpack packaging solutions that provide long shelf life.











Cardboard Skinpack


Deep Skinpack


Skinpack







What can be packaged with

Skinpack Machines?

Tray Sealing Machines are packaging machines commonly used in the food industry and offer ideal solutions for a wide range of products. By using food-grade gases during packaging, they extend the shelf life of the packaged foods.


- Meat and Meat Products
- Cheese and Dairy Products
- Seafood Products
- Fruits and Vegetables
- Ready-to-Eat Meals
- Sweets and Chocolates
- Baked Goods
- Industrial and Medical Products





TERMOFORM MACHINES

Termoform Machines W300

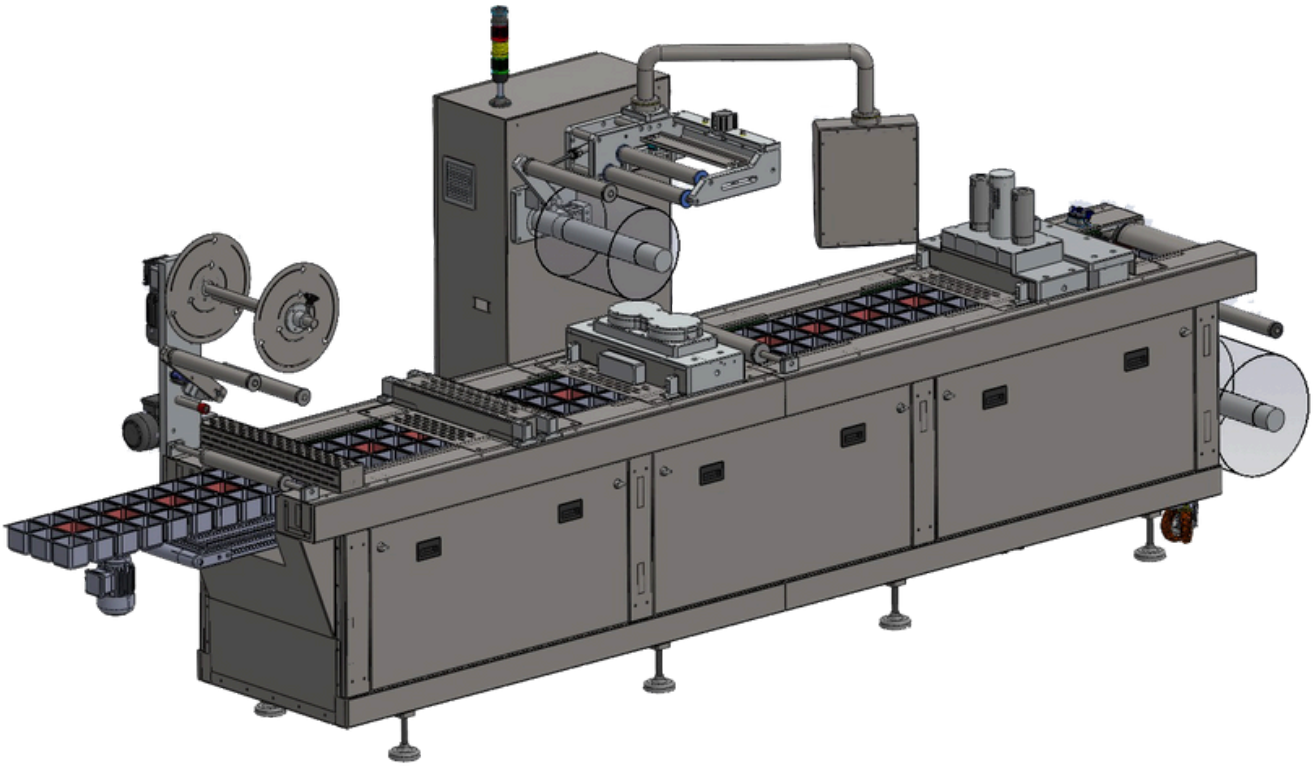

- **Machine Length :** 3000mm – 150000mm
- **Forming Depth:** 85mm. /150mm.
- **Reel Core Diameter:** 2×300 (600m³)
- **Reel Diameter:** 400mm -.300mm
- **PLC System: SCHINEIDER / OMRON**
- **Pitch:** 100 mm – 600mm
- **Top Film:** (PA+PE)
- **Bottom Film:** (PA+PE) / (PVC+PE) / (PET+PE)
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE


VACUUM
PACKAGING
MACHINES




- Conveyor Vacuum Machine
  (W110C, W135C, SHRINK TUNNEL, DRY TUNNEL)
- Double Chamber Models
  (W100, W86, W72, W55)
- Floor Standing Models
  (W104, W68, W52, W51H, W48H)
- Table Top Models
  (W51XL, W51, W48, W42, W35ML)
- Vertical Models
  (W700)



Conveyor Model W110C



- **Machine Dimensions :** 1320 x 3365 x 2000 h mm
- **Chamber Size :** 1225 x 1070 x 220 h mm
- **Pump Capacity :** 2×300 (600m³)
- **Sealing Jaw Length:** 1100mm
- **PLC System: SCHINEIDER / OMRON**
- **kW:** 20 kW
- **Weight :** 1800 kg
- **Closing Operation :** 15-25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

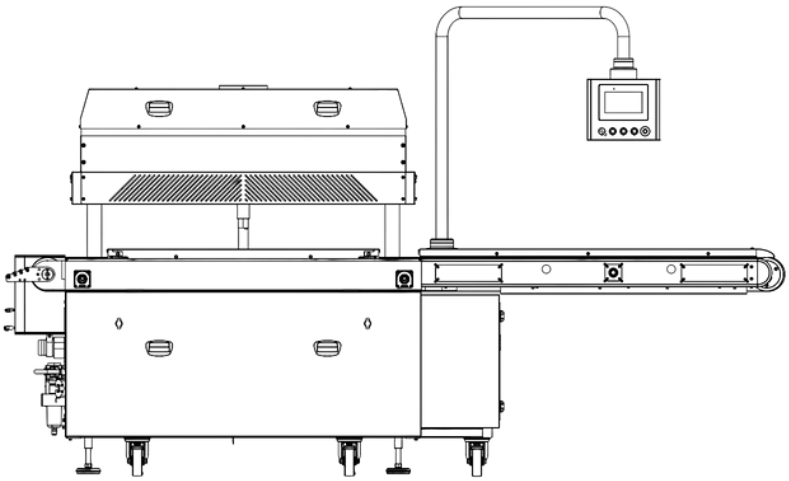


In case Shrink Tunnel and Drying Tunnel are purchased separately from the main machine, an optional control panel is available.

Conveyor Model W135C



- **Machine Dimensions :** 1320 x 4130 x 2000 h mm
- **Chamber Size :** 1500 x 1075 x 220 h mm
- **Pump Capacity :** 2×300 (600m³)
- **Sealing Jaw Length:** 1350mm
- **PLC System: SCHINEIDER / OMRON**
- **kW:** 20 kW
- **Weight :** 2000 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

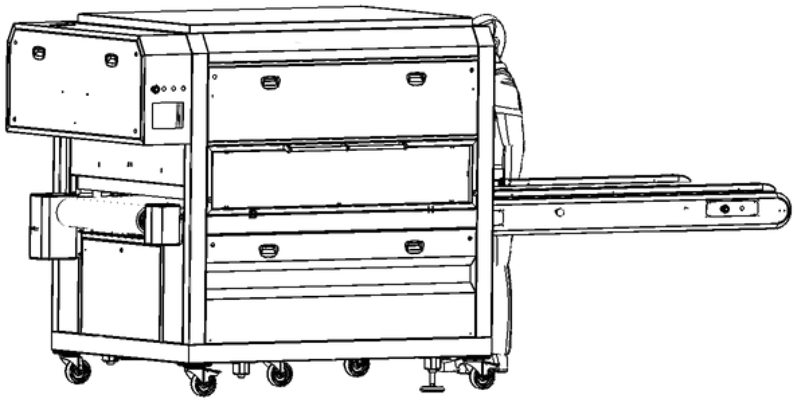


In case Shrink Tunnel and Drying Tunnel are purchased separately from the main machine, an optional control panel is available.

Conveyor Model SHRINK TUNNEL



- **Machine Dimensions :** 1500mmx1200mmx1600mm
- **Hot Water Spraying:** Top and Bottom
- **Control Panel:** Schneider
- **Conveyor Dimensions:** 770×1200
- **Conveyor Belt:** Removable, Wire
- **kW:** 35 kW
- **Conveyor Speed:** Adjustable
- **Protection Class:** IP63
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

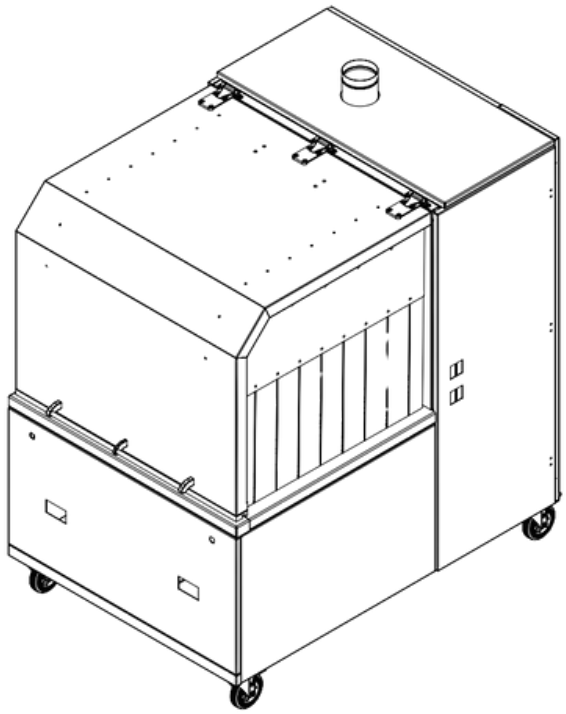


In case Shrink Tunnel and Drying Tunnel are purchased separately from the main machine, an optional control panel is available.

Conveyor Model DRY TUNNEL



- **Machine Dimensions :** 1500mmx1200mmx1600mm
- **Hot Water Spraying:** Top and Bottom
- **Control Panel:** Schneider
- **Conveyor Dimensions:** 770×1200
- **Conveyor Belt:** Removable, Wire
- **kW:** 35 kW
- **Conveyor Speed:** Adjustable
- **Blowing System:** 8 kw
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

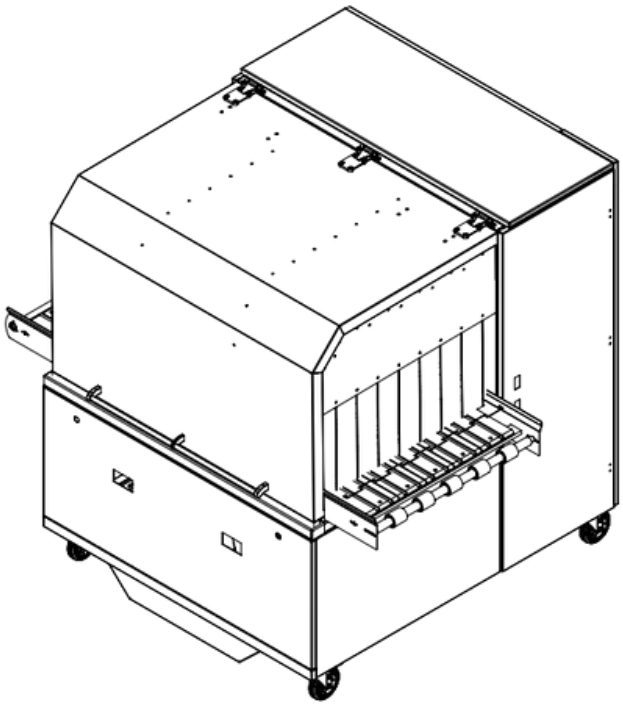



In case Shrink Tunnel and Drying Tunnel are purchased separately from the main machine, an optional control panel is available.

Double Chamber Models W100



- **Machine Dimensions :** 2425 x 1140 x 1100 h mm
- **Chamber Size :** 1225 x 950 x 220 h mm
- **Pump Capacity :** 300 m³ / h
- **Sealing Bar :** 4 x 1000 mm
- **Power :** 3P+N+PE 380V 50Hz
- **kW :** 9 - 11 kW
- **Weight :** 750 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

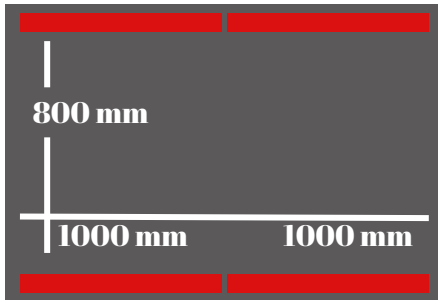


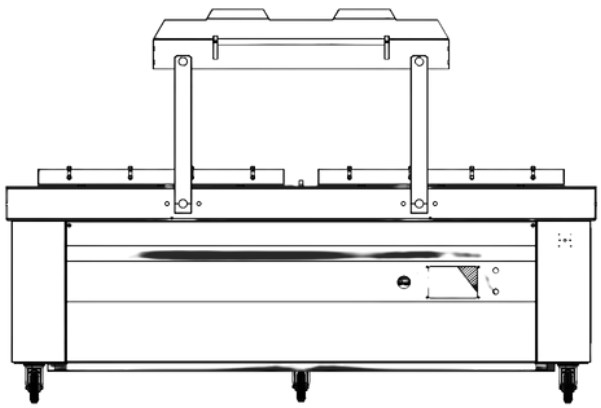


Double Chamber Models W86



- **Machine Dimensions :** 1065 x 2080 x 1100 h mm
- **Chamber Size :** 860 x 1000 x 220 h mm
- **Pump Capacity :** 200 m³ / h (300 m³ Opt.)
- **Sealing Bar :** 4 x 860 mm
- **Power :** 3P+N+PE 380V 50Hz
- **kW :** 8 - 10 kW
- **Weight :** 550 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

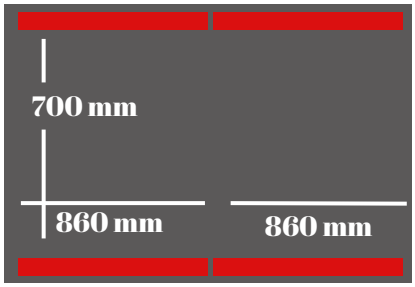


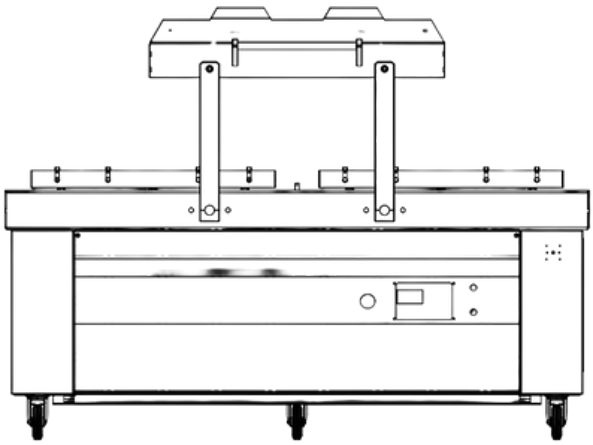


Double Chamber Models W72



- **Machine Dimensions :** 1065 x 1790 x 1100 h mm
- **Chamber Size :** 840 x 860 x 220 h mm
- **Pump Capacity :** 105 m³ / h (151 m³ Opt.)
- **Sealing Bar :** 4 x 720 mm
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW:** 3.5 - 4.5 kW
- **Weight :** 450 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

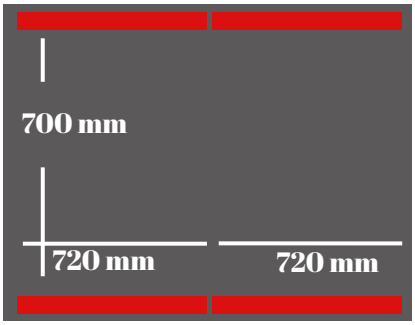


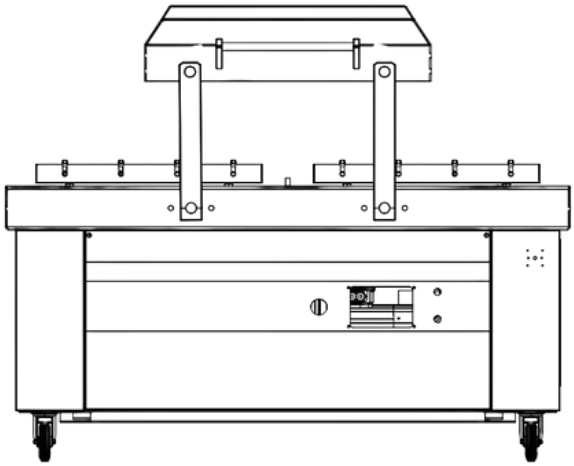


Double Chamber Models W55



- **Machine Dimensions :** 965 x 1460 x 1100 h mm
- **Chamber Size :** 770 x 720 x 220 h mm
- **Pump Capacity :** 105 m³ / h (151 m³ Opt.)
- **Sealing Bar :** 4 x 550 mm
- **Power :** 3P+N+PE 380V 50Hz
- **kW:** 3.5 - 4.5 kW
- **Weight :** 350 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

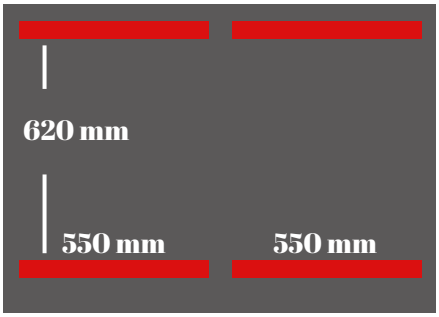

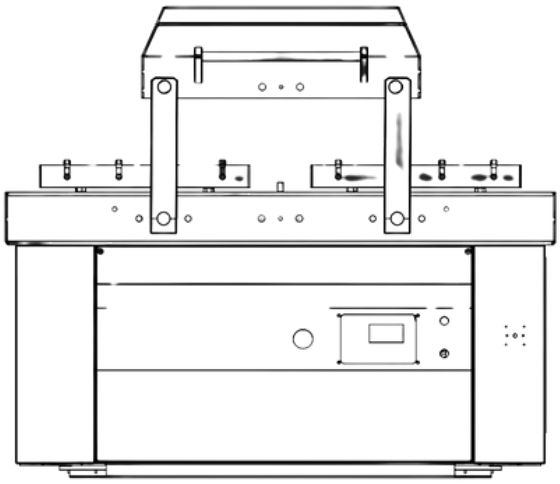

VOLVAC

volvac

Double Chamber Pro Models

Package your everyday products quickly and with the highest quality, effortlessly and practically!













All Electrical Componets are World Brands and 2 years under the warranty (Mainly Schneider, Siemens)

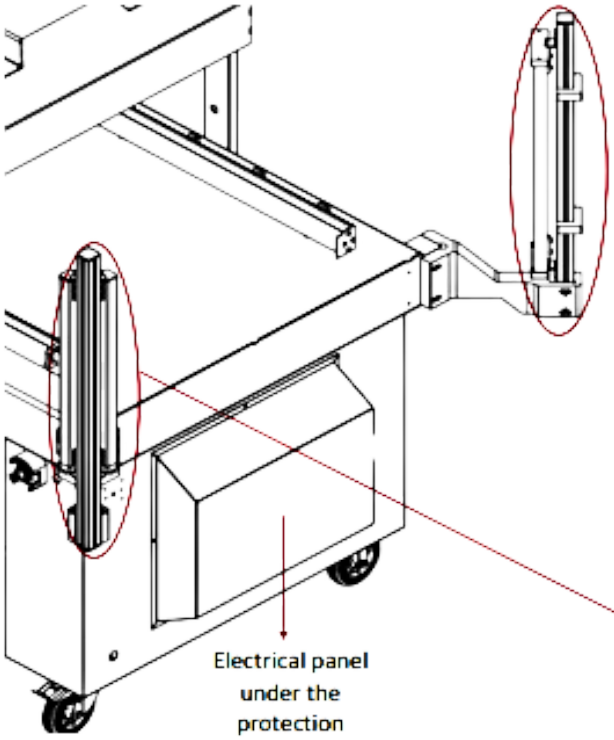

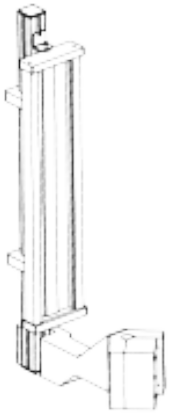

4-Corner Sensor System ;

Mirrors ensuring peripheral safety;

Provides complete safety by covering the reflection of the laser in the sensor and the entire area around the machine.

Prevent hazards that may occur during the operation of the machine. This increases the safety of the operators

Electrical panel under the protection





The sensor provide instant interaction, quickly stopping the machine in the event of any danger.

This protects both safety and the life of the machine.



→ Stable 7" Scheider Touch Control Screen

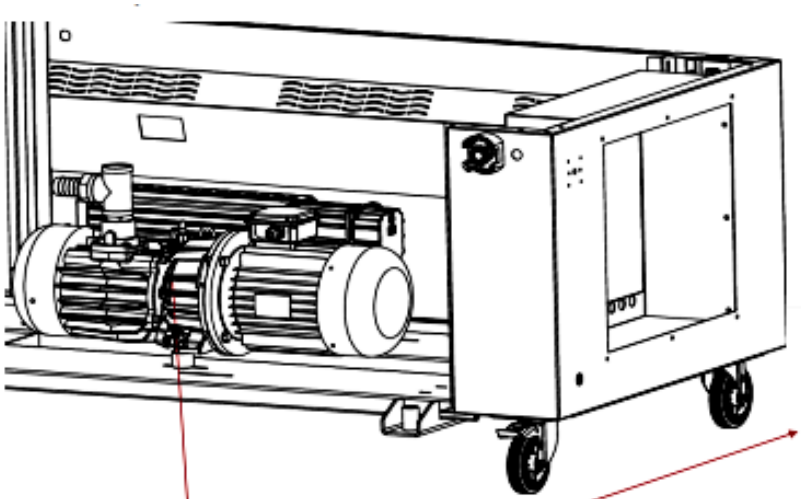




SMC (Japon) Vacuum and Discharge Valves



Vacuum Filter ; Prevents foreign objects such as dust from entering

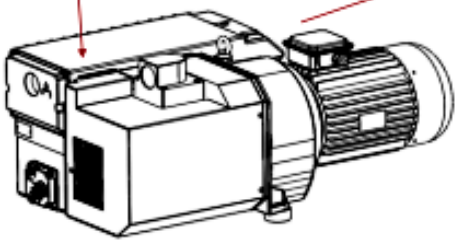

Using Italian Vacuum Pump (DVP or GEV) also according to customer request BUSCH brand as an Optional

Pump Capacity between 105 m³/h to 300m³/h

The Red (Oxygen) Pump for Fresh Meat in MAP as an optional


High strong pumping (0.01 mbar vacuum value)





Floor Standing W104



- **Machine Dimensions :** 960 x 1175 x 1130 h mm
- **Chamber Size :** 752 x 1068 x 180 h mm
- **Pump Capacity :** 105 m³ / h (151 m³ Opt.)
- **Sealing Bar :** 2 x 680 mm - 1040 mm
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW :** 5 - 7.5 kW
- **Weight :** 360 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

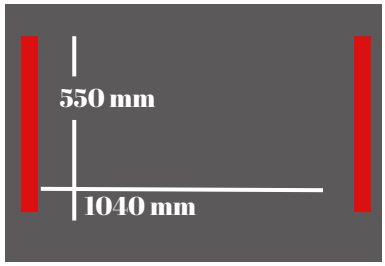

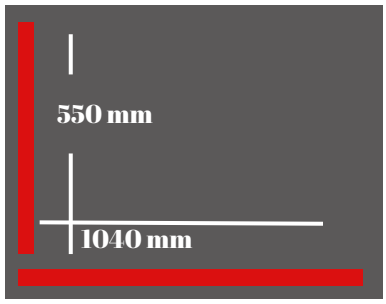


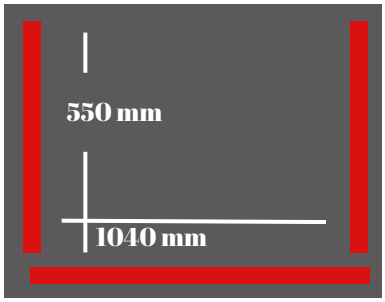


Floor Standing W68



- **Machine Dimensions :** 675 x 775 x 1030 h mm
- **Chamber Size :** 540 x 712 x 130 h mm
- **Pump Capacity :** 45 m³ / h (65 m³ Opt.)
- **Sealing Bar :** 2 x 680 mm
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW :** 2.5 kW
- **Weight :** 162 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

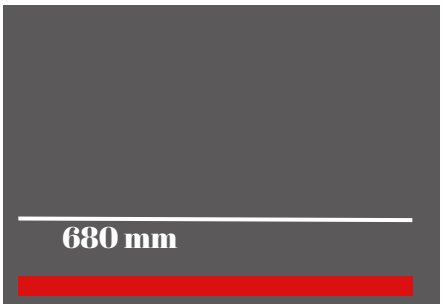


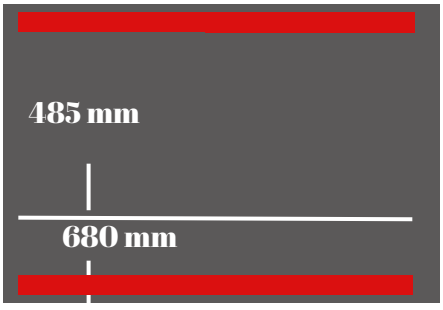


Floor Standing W52



- **Machine Dimensions :** 675 x 775 x 1030 h mm
- **Chamber Size :** 540 x 712 x 130 h mm
- **Pump Capacity :** 45 m³ / h (65 m³ Opt.)
- **Sealing Bar :** 2 x 520 mm
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW :** 2.5 kW
- **Weight :** 159 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

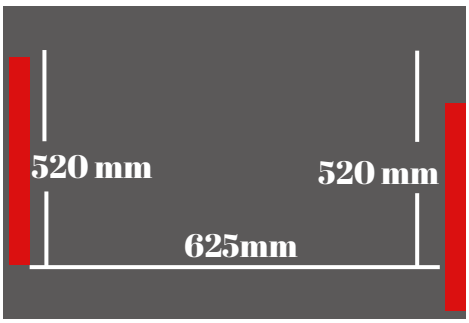


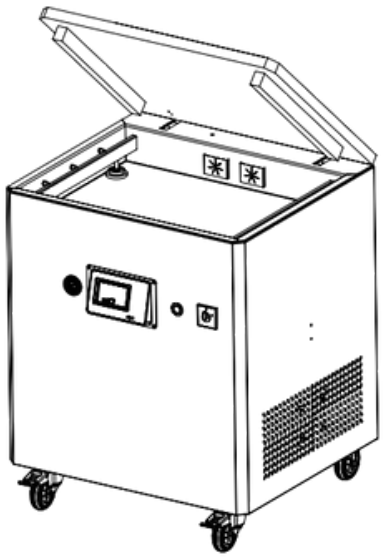


Floor Standing W51H



- **Machine Dimensions :** 631 x 585 x 1015 h mm
- **Chamber Size :** 497 x 522 x 130 h mm
- **Pump Capacity :** 21 m³ / h (45 m³ Opt.)
- **Sealing Bar :** 510 mm
- **Power :** 220 volt 50/60 Hz
- **kW :** 2 kW - 2.5 kW
- **Weight :** 122 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

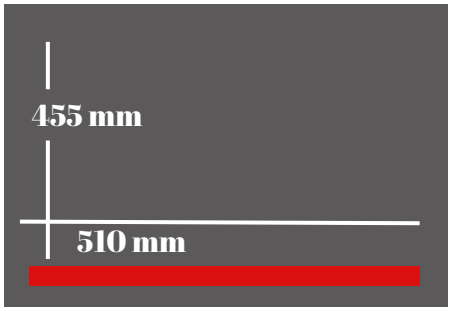


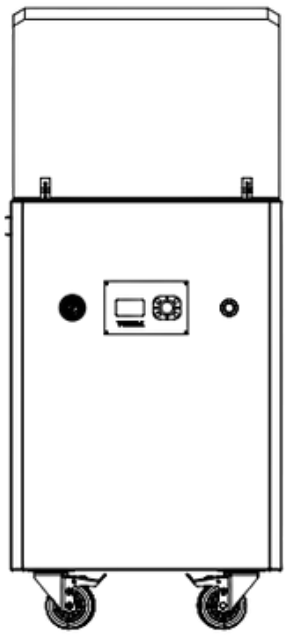

Floor Standing W48H



- **Machine Dimensions :** 631 x 585 x 900 h mm
- **Chamber Size :** 497 x 522 x 130 h mm
- **Pump Capacity :** 21 m³ / h (45 m³ Opt.)
- **Sealing Bar :** 2 x 480 mm
- **Power :** 220 volt 50/60 Hz
- **kW:** 2 kW - 2.5 kW
- **Weight :** 122 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

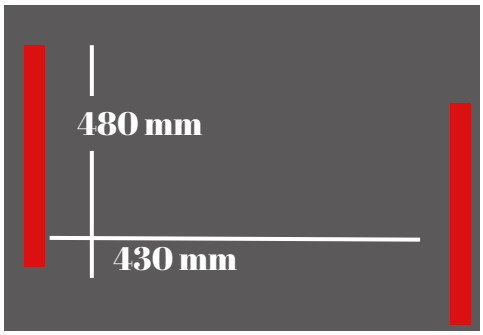


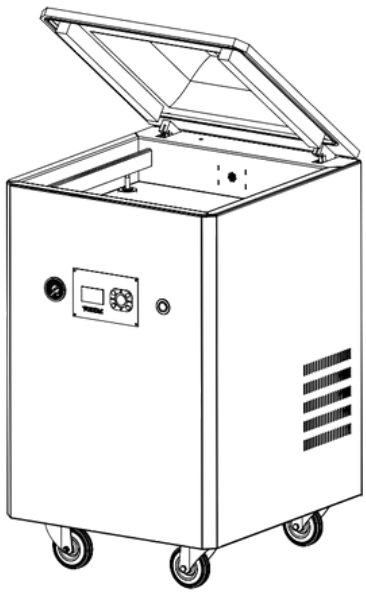


Table Top Models W51XL

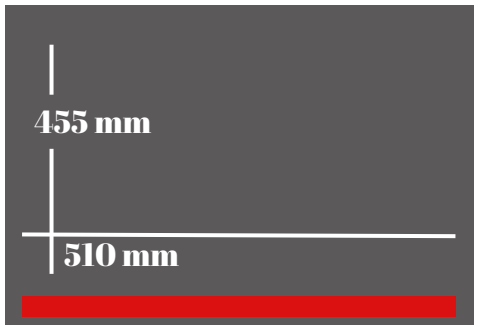

- **Machine Dimensions :** 631 x 585 x 480 h mm
- **Chamber Size :** 497 x 522 x 190 h mm
- **Pump Capacity :** 21 m³ / h
- **Sealing Bar :** 510 mm
- **Power :** 220 volt 50/60 Hz
- **kW:** 2 kW
- **Weight :** 104 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE




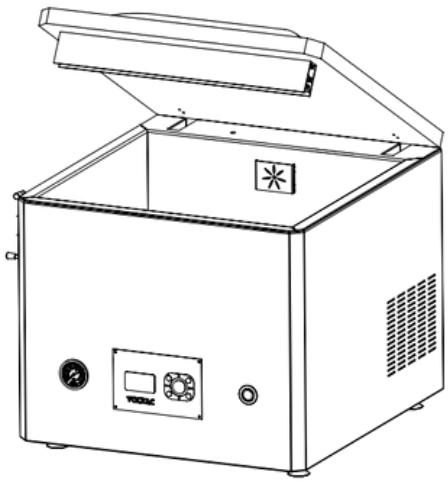


Table Top Models W51

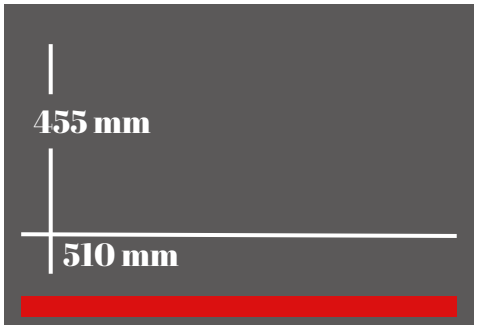

- **Machine Dimensions :** 630 x 585 x 480 h mm
- **Chamber Size :** 497 x 522 x 130 h mm
- **Pump Capacity :** 21 m³ / h
- **Sealing Bar :** 510 mm
- **Power :** 220 volt 50/60 Hz
- **kW:** 2 kW
- **Weight :** 95 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE




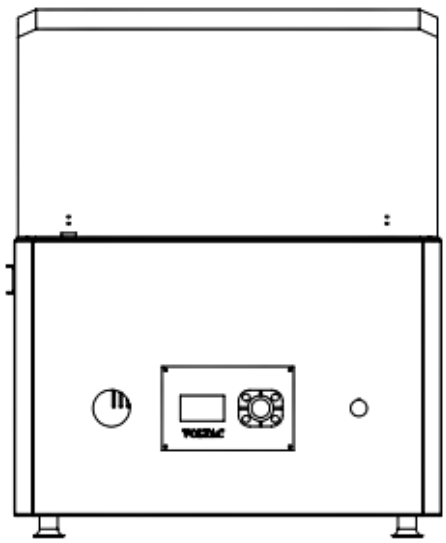


Table Top Models W48

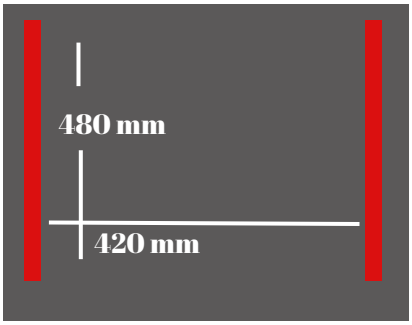

- **Machine Dimensions** 630 x 585 x 475 h mm
- **Chamber Size :** 497 x 522 x 130 h mm
- **Pump Capacity** 21 m³ / h
- **Sealing Bar :** 2 x 480 mm
- **Power :** 220 volt 50/60 Hz
- **kW:** 2 kW
- **Weight :** 95 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 years
- **Certificate:** CE




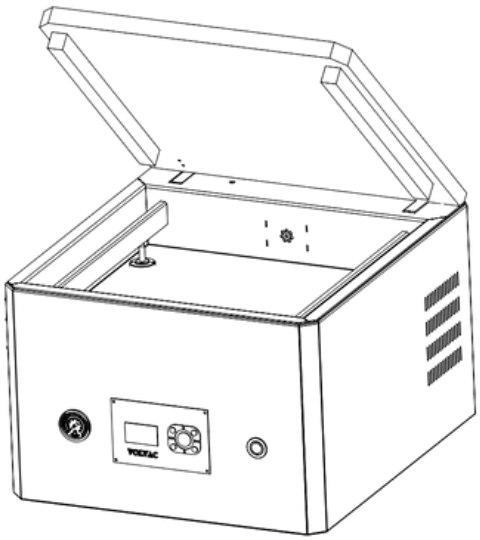


Table Top Models W42

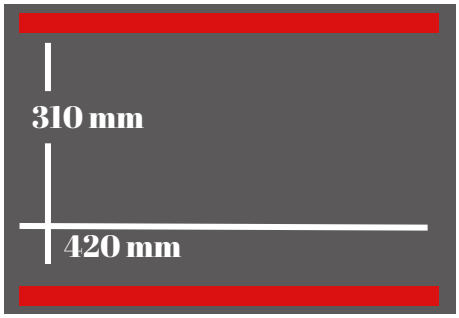

- **Machine Dimensions :** 568 x 500 x 452 h mm
- **Chamber Size :** 437 x 434 x 130 h mm
- **Pump Capacity :** 21 m³ / h
- **Sealing Bar :** 2 x 420 mm
- **Power :** 220 volt 50/60 Hz
- **kW :** 1.5 kW
- **Weight :** 62 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE





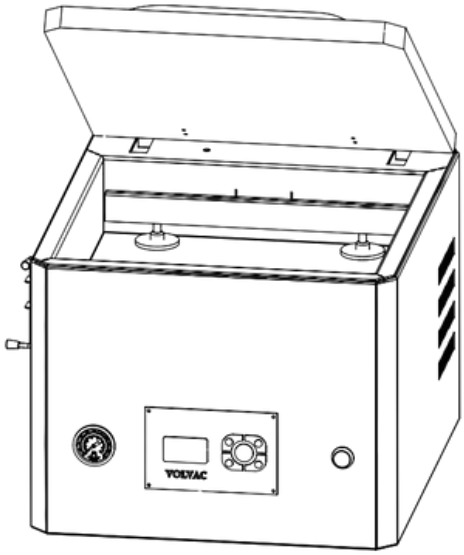


Table Top Models W35ML



- **Machine Dimensions :** 510 x 763 x 475 h mm
- **Chamber Size :** 700 x 375 x 160 h mm
- **Pump Capacity :** 21 m³ / h
- **Sealing Bar :** 2 x 350 mm
- **Power :** 220 volt 50/60 Hz
- **kW** 1.5 kW
- **Weight :** 80 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

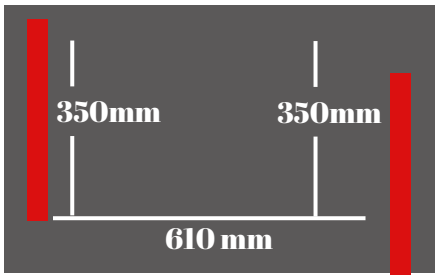

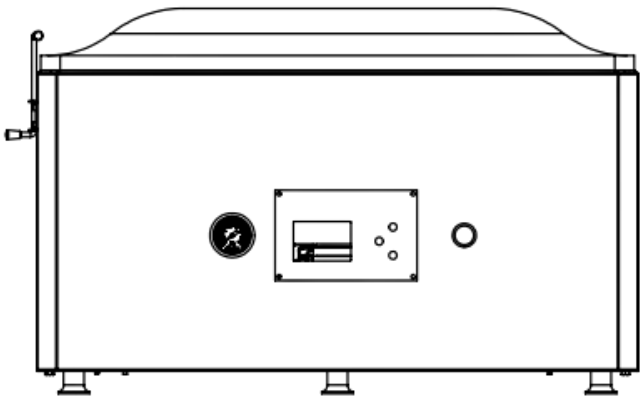

Vertical Model W700



- **Machine Dimensions :** 1700 x 1725 x 1410 h mm
- **Chamber Size :** 890 x 850 x 255 h mm
- **Pump Capacity :** 151 m³ / h
- **Sealing Bar :** 2 x 700 mm
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW:** 3.5 - 4.5 kW
- **Weight :** 600 kg
- **Closing Operation :** 15 - 25 seconds
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

DIP TANK MACHINES





- VOLVAC-DT480
- VOLVAC-DT650



Dip Tank Models DT-480



- **Machine Dimensions :** 671 x 1233 x 1340 h
- **Dipping Platform Dimensions:** 450x600mm
- **Stroke Dipping Table :** 300mm
- **Max Product Height :** 300mm
- **Stainless Steel Dipping Platform :** Standard
- **Water Content Capacity :** 95 liter
- **Max Product Weight :** 30 kg
- **Power Lifting Platform :** Pneumatic
- **Stainless Steel Cover :** Standard

- **Dip Time Controller :** Standard
- **Temperature Control :** Automatic
- **Cycle Time :** 3 - 4 seconds
- **Outer Body :** Stainless Steel AISI304
- **Power Supply :** 400 - 3 - 50/60 Hz
- **Voltage :** 7,5 kW - 10 kW
- **Warranty :** 2 Years
- **Certificate :** CE

Dip Tank Models DT-650



- **Machine Dimensions :** 771 x 1233 x 1340 h
- **Dipping Platform Dimensions:** 550x700
- **Stroke Dipping Table :** 300 mm
- **Max Product Height :** 350 mm
- **Stainless Steel Dipping Platform :** Standard
- **Water Content Capacity :** 125 liter
- **Max Product Weight :** 35 kg
- **Power Lifting Platform :** Pneumatic
- **Stainless Steel Cover :** Standard

- **Dip Time Controller :** Standard
- **Temperature Control :** Automatic
- **Cycle Time :** 3 - 4 seconds
- **Outer Body :** Stainless Steel AISI304
- **Power Supply :** 400 - 3 - 50/60 Hz
- **Voltage :** 7,5 kW - 15 kW
- **Warranty :** 2 Years
- **Certificate :** CE


AUTOMATIC
SLICER
MACHINE





VOLVAC-S20





Automatic Slicer Model S20



- **Machine Dimensions :** 1500 x 1300 x 750 mm
- **Chamber Size :** 180 x 120 mm
- **Cycle:** Between 1 mm to 40 mm
- **Capacity :** 250 silices/minute
- **Power :** 3P+N+PE 380V 50/60Hz
- **kW:** 1,5 kW
- **Pneumatic Feeding :** 16 Nl/6-8 bar
- **Memory :** 99 Piece
- **Outer Body :** Stainless Steel AISI304
- **Warranty :** 2 Years
- **Certificate:** CE

VOLVAC IN WORLD





volvac

PACKAGING SOLUTIONS

VOLVAC PAKETLEME VE GIDA MAKİNALARI SAN. TİC. LTD. ŞTİ.

Sanayi District Ensar Street No: 3/1
Pendik, Istanbul

Phone : 0216 441 10 72

E-Mail : info@volvac.com.tr

VOLVAC GERMANY (OFFICE)

Ikarusallee 15, 30179
Hannover, Almanya

Phone : +49 163 263 39 94

E-Mail : info@volvacgermany.de